


Mechanical seal pumps Series SB - PP/PVDF

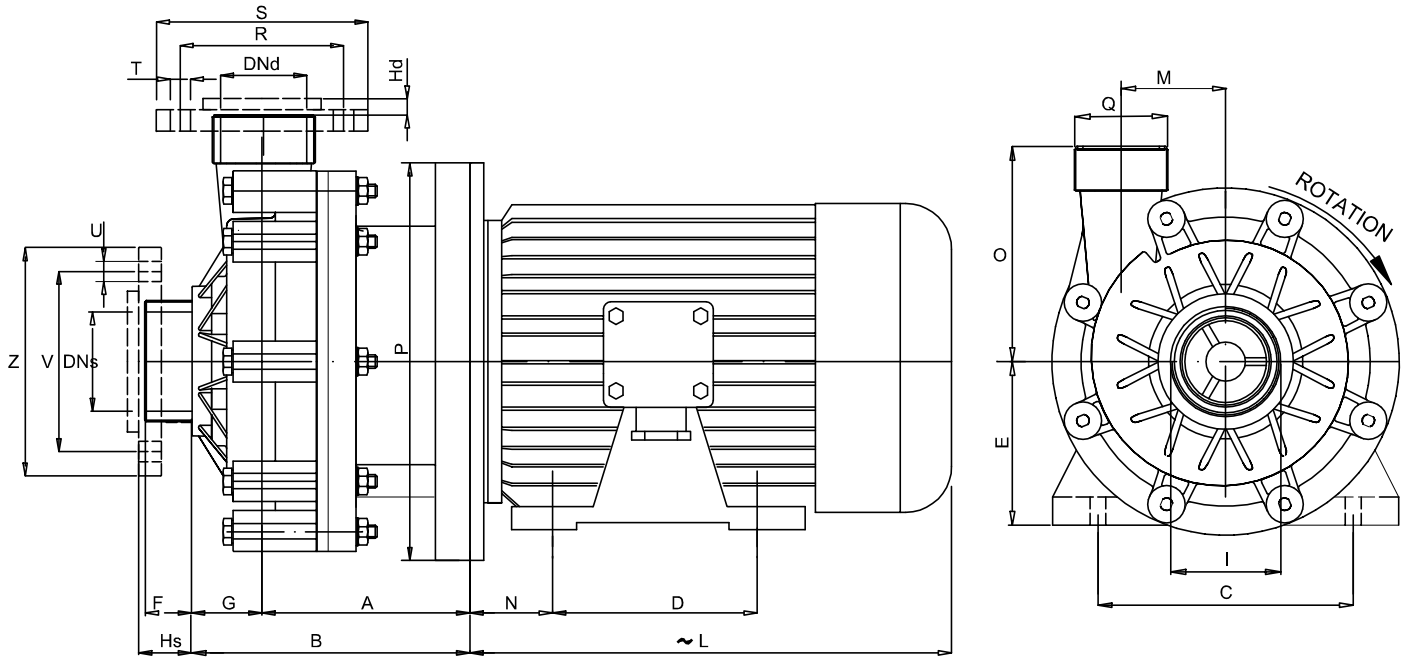

NOTE:
THE DIMENSION'S ARE PURE INDICATIVE AND CAN BE
CHANGED WITHOUT PRIOR NOTICE.

NOTE:
DIRECTION OF ROTATION IS COUNTER CLOCKWISE
AS SEEN WHEN FACING THE MOTOR.
PUMPS AVAILABLE THREADED OR FLANGED.

PUMP	MOTOR FLANGE B3 - B5	POT. Kw	DIMENSIONS - mm -															
			A	B	C	D	E	F	G	Hs	Hd	I	~ L	M	N	O	P	Q
SB95	G 71 B	0.55	110	180	112	90	71	-	70	20	9	1 1/2" FEMALE	207	45	45	100	160	1"
SB110	G 80 B	1.1	199	260	125	100	80	30	61	44	13	2" MALE	236	66	50	135	200	1 1/2" MALE
SB120	G 90 S	1.5	199	260	140	100	90	30	61	44	13	2" MALE	256	66	56	135	200	1 1/2" MALE
SB130	G 90 S	2.2	199	260	140	100	90	30	61	44	13	2" MALE	256	66	56	140	200	1 1/2" MALE
SB140	G 100 L	3	219	280	160	140	100	30	61	44	13	2" MALE	315	66	63	140	250	1 1/2" MALE
SB150	G 132 S	5.5	184	235	216	140	132	40	51	50	10	3" MALE	360	82.5	89	170	300	2 1/2" MALE
SB155	G 132 S	5.5	184	235	216	140	132	40	51	50	10	3" MALE	360	82.5	89	170	300	2 1/2" MALE
SB160	G 132 M	7.5	184	235	216	178	132	40	51	50	10	3" MALE	400	82.5	89	170	300	2 1/2" MALE
SB170	G 132 M	7.5	184	235	216	178	132	40	51	50	10	3" MALE	400	82.5	89	170	300	2 1/2" MALE

PUMP	FLANGES DIMENSIONS - mm -							
	R	S	T	U	V	Z	DNs	DNd
SB95	85	115	14	14	110	150	40	25
SB110	110	153	18	18	125	168	50	40
SB120	110	153	18	18	125	168	50	40
SB130	110	153	18	18	125	168	50	40
SB140	110	153	18	18	125	168	50	40
SB150	125	168	18	18	145	188	65	50
SB155	125	168	18	18	145	188	65	50
SB160	125	168	18	18	145	188	65	50
SB170	125	168	18	18	145	188	65	50

FLANGES
DIN PN 10